

# Microwave coaxial

## Type: A 50 UFP



### Engineering data

#### Cable design

Center conductor	silver-plated solid copper wire
Dielectric	ePTFE wrapped
Shield	silver-plated copper tape silver-plated braid
Jacket	FEP
Out-side diameter	Ø 5,2 mm
Weight	0,062 kg/m

#### Electrical data

Impedance	50 ohms
Capacitance	80 pF/m
Frequency range	DC – 26,5 GHz.
V.S.W.R.	<1,30
Insertion loss	see table 1
Velocity of propagation	84 %
Shielding effectiveness	< -100 dB/m typical

#### Mechanical and environmental data

Temperature range	-65 to +165°C
Salt spray	96 hours
Bending radius	35 mm (static) 90 mm (dynamic)





Table 1

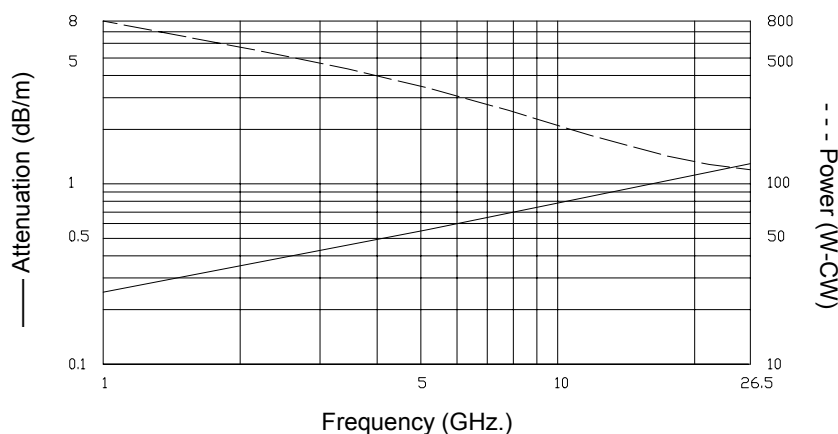

© GigaLink Microwave Connection Engineering b.v. Subject to change without prior notice.

## High Performance ultra low loss coaxial cable

**Frequency range:**  
DC – 26,5 GHz.

#### Gigalink Microwave Connection Engineering B.V.

Albert Plesmanweg 39 T  
3088 GB ROTTERDAM

Tel. +31 (0) 10 789 11 22  
Fax. +31 (0) 10 789 11 44  
E-mail: info@gigalink-mce.com

[www.gigalink-mce.com](http://www.gigalink-mce.com)

GTD-03-050-040402

This product is manufactured by Compagnie **Deutsch Bus & Microwave**.