

# Microwave coaxial

## Type: A 120 FP



### Engineering data

#### Cable design

Center conductor	silver-plated flexible copper wire
Dielectric	ePTFE wrapped
Shield	silver-plated tape wrapped silver-plated braid
Jacket	FEP
Out-side diameter	Ø 10,3 mm
Weight	0,220 kg/m

#### Electrical data

Impedance	50 ohms
Capacitance	80 pF/m
Frequency range	DC – 12 GHz.
V.S.W.R.	<1,30
Insertion loss	see table 1
Velocity of propagation	84 %
Shielding effectiveness	< -100 dB/m typical

#### Mechanical and environmental data

Temperature range	-65 to +165°C
Salt spray	96 hours
Bending radius	80 mm (static) 100 mm (dynamic)
Flex life	>15.000





Table 1

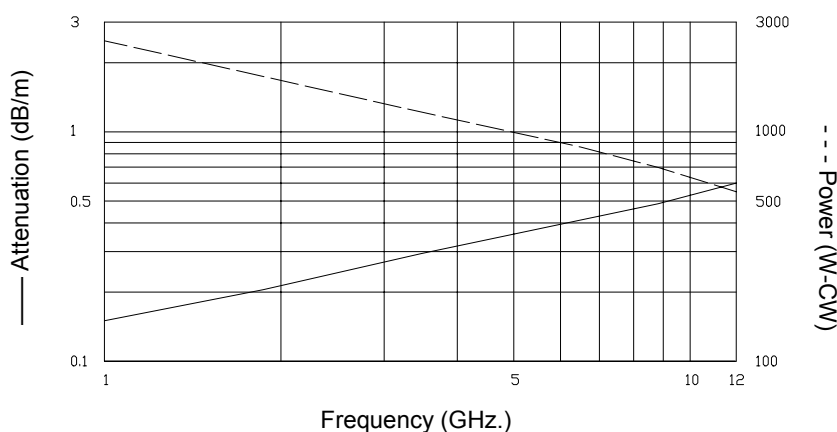

© GigaLink Microwave Connection Engineering B.V. Subject to change without prior notice.

## High Dynamic ultra low loss coaxial cable

**Frequency range:**  
DC – 12 GHz.

#### Gigalink Microwave Connection Engineering B.V.

Albert Plesmanweg 39 T  
3088 GB ROTTERDAM

Tel. +31 (0) 10 789 11 22  
Fax. +31 (0) 10 789 11 44  
E-mail: info@gigalink-mce.com

[www.gigalink-mce.com](http://www.gigalink-mce.com)

GTD-09-121-040402

This product is manufactured by Compagnie **Deutsch Bus & Microwave**.